


# Kuri Tec® All Purpose Non-Reinforced Clear Vinyl Tubing

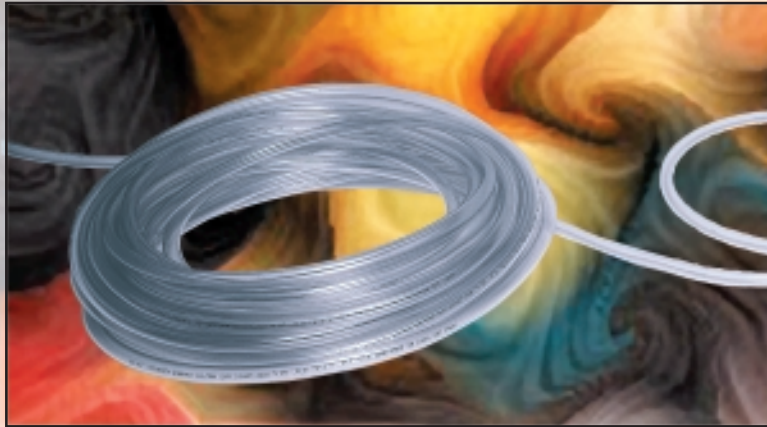

## Features:

- High gloss crystal clear appearance with glass smooth interior to reduce sediment buildup
- FDA compliant, non-toxic PVC compound
- Self-extinguishing
- Compound hardness 73 ±3 Shore "A"

## Applications:

- Air conditioning drainage
- Refrigeration drainage
- Air lines
- Printing press equipment
- High efficiency furnace drainage
- Transfer of weak chemicals and acids

## Series K050

**Service Temperature Range:**  
+25°F (-4°C) to 150°F (+65°C)

Series Number	Size Code	Nominal ID		Nominal OD		Nominal Wall Thickness		Working Pressure (psi) @70°F(20°C)	Standard Length Ctn/Coils	Approx. Wgt. Per Pkg. (lbs.)
		(in)	(mm)	(in)	(mm)	(in)	(mm)			
K050	0204	1/8	3.2	1/4	6.4	1/16	1.6	65	100 ft	2.0 lbs
K050	0305	3/16	4.8	5/16	7.9	1/16	1.6	55	100 ft	2.7 lbs
K050	0406	1/4	6.4	3/8	9.5	1/16	1.6	55	100 ft	3.4 lbs
K050	0408	1/4	6.4	1/2	12.7	1/8	3.2	60	100 ft	8.0 lbs
K050	0507	5/16	7.0	7/16	11.1	1/16	1.6	50	100 ft	4.0 lbs
K050	0608	3/8	9.5	1/2	12.7	1/16	1.6	45	100 ft	4.7 lbs
K050	0609	3/8	9.5	9/16	14.3	3/32	2.4	50	100 ft	7.5 lbs
K050	0610	3/8	9.5	5/8	15.9	1/8	3.2	55	100 ft	10.7 lbs
K050	0810	1/2	12.7	5/8	15.9	1/16	1.6	30	100 ft	6.0 lbs
K050	0812	1/2	12.7	3/4	19.1	1/8	3.2	45	100 ft	13.4 lbs
K050	1013	5/8	15.9	13/16	20.6	3/32	2.4	35	100 ft	11.6 lbs
K050	1014	5/8	15.9	7/8	22.2	1/8	3.2	40	100 ft	16.1 lbs
K050	1216	3/4	19.1	1	25.4	1/8	3.2	35	100 ft	18.8 lbs
K050	1418	7/8	22.2	1 1/8	28.6	1/8	3.2	30	100 ft	21.4 lbs
K050	1620	1	25.4	1 1/4	31.8	1/8	3.2	25	100 ft	24.1 lbs
K050	2024	1 1/4	31.8	1 1/2	38.1	1/8	3.2	20	50 ft	14.8 lbs
K050	2430	1 1/2	38.1	1 7/8	47.6	3/16	4.8	30	50 ft	27.1 lbs
K050	2432	1 1/2	38.1	2	50.8	1/4	6.4	35	50 ft	37.5 lbs
K050	3240	2	50.8	2 1/2	63.5	1/4	6.4	35	50 ft	48.2 lbs

BECAUSE WE CONTINUALLY EXAMINE WAYS TO IMPROVE OUR PRODUCTS, WE RESERVE THE RIGHT TO ALTER SPECIFICATIONS WITHOUT PRIOR NOTICE.



## Kuriyama of America, Inc.

1221 Landmeier Rd. • Elk Grove Village, IL 60007-2458

Phone: (847) 228-0300 • Toll-free FAX: (800) 800-0320 • International FAX: (847) 228-0973

Web Site: <http://www.kuriyama.com>

E-Mail: [sales@kuriyama.com](mailto:sales@kuriyama.com)

**SALES OFFICES —  
CONTACT THE LOCATION BELOW  
WHICH SERVES YOUR AREA**

**SOUTHWEST WAREHOUSE  
KURIYAMA OF AMERICA, INC.  
HOUSTON**  
8919 MARKET ST.  
HOUSTON, TX 77029  
Phone: (713) 674-8212  
FAX: (713) 674-5214  
Toll-Free FAX: (800) 800-5214

**WESTERN WAREHOUSE  
KURIYAMA OF AMERICA, INC.  
SANTA FE SPRINGS**  
11920 ALTAMAR PLACE  
SANTA FE SPRINGS, CA 90670-2544  
Phone: (562) 941-4507  
FAX: (562) 941-8940  
Toll-Free FAX: (800) 326-8940

**SOUTHEAST WAREHOUSE  
FORTNEY SALES**  
1580 BIG SHANTY ROAD  
KENNESAW, GA 30144-3606  
Phone: (770) 427-6528  
FAX: (770) 423-9249  
Toll-Free FAX: (800) 423-9249

**EASTERN WAREHOUSE  
EASTERN RUBBER & PLASTICS CO., INC.**  
PLUMSTEAD INDUSTRIAL PARK, RT. 537  
P. O. BOX 176  
NEW EGYPT, NJ 08533-0176  
Phone: (609) 758-0100  
FAX: (609) 758-0102  
Toll-Free FAX: (800) 445-7138

**IN CANADA:**

**KURITEC CORPORATION**  
BOX 21052  
LYNDEN PARK MALL P. O.  
BRANTFORD, ONT, CANADA N3R 7W9  
Phone: (519) 753-6717  
FAX: (519) 753-7737

Web Site: <http://www.kuritec.com>  
E-Mail: [sales@kuritec.com](mailto:sales@kuritec.com)

# Cautionary Statement

All merchandise or products sold or distributed by Kuriyama of America, Inc. ("Kuriyama"), are in the nature of commodities and they are sold by our published specifications and not for particular purposes, uses or applications. The purchasers or users of the merchandise or products shall first determine their suitability for the intended purposes, uses or applications and they shall either conduct their own engineering studies or tests, or retain qualified engineers, consultants or testing laboratories and consult with them before determining the proper use, suitability or propriety of the merchandise or products for the intended purposes, uses or applications.

Kuriyama does not recommend the merchandise or products for any particular purpose, use or application, and the purchaser or user thereof shall assume full responsibility for the suitability, propriety, use and application of the merchandise or products. The merchandise or products, including but not limited to, hose, tubing or coupling may fail due to the use or conveyance of substances at elevated or lowered temperatures or at excessive pressures, the conveyance of abrasive, injurious, flammable, explosive or damaging substances.

Hose or tubing used in bent configurations will be subjected to increased abrasion. Hose clamps or couplings may loosen after initial installation and all sections of hose and tubing, including connections, couplings and clamps, should be inspected frequently, regularly and consistently, and should be replaced, adjusted or re-tightened for the avoidance of leakage, for the prevention of injuries or damages, and for general safety purposes. Except as indicated in its Limited Warranty, Kuriyama shall not be liable or responsible for direct or indirect injuries or damages caused by or attributed to the failure or malfunction of any merchandise or products sold or distributed by it.

Kuriyama recommends that the purchasers or users of the merchandise or products frequently and consistently undertake inspections and protective measures with respect to the use and application of the merchandise and products which should include the examination of tube and cover conditions of the hose or tubing and the identification, repair or replacement of sections showing cracking, blistering, separations, internal and external abrasions, leaking or slipped couplings or connections and make proper proof tests.

## Limited Warranty

The merchandise or products sold or distributed by Kuriyama of America, Inc. are warranted to our customers to be free from defects in material and workmanship at the time of shipment by us. All warranty claims shall be made within six (6) months after we have shipped the merchandise. Our liability hereunder is limited to the purchase price of any merchandise proving defective, or, at our option, to the replacement of such merchandise upon its authorized return to us.

This warranty is in lieu of and excludes all other warranties, expressed, implied, statutory, or otherwise created under applicable law including, but not limited to, the warranty of merchantability and the warranty of fitness for a particular purpose. In no event shall we be liable for special, incidental, or consequential damages, including loss of profits.

REV. 1/92



## Kuriyama of America, Inc.

1221 Landmeier Rd.  
Elk Grove Village, IL 60007-2458  
Phone: (847) 228-0300  
Toll-free FAX: (800) 800-0320  
International FAX: (847) 228-0973

Web Site: <http://www.kuriyama.com>  
E-Mail: [sales@kuriyama.com](mailto:sales@kuriyama.com)